



Compact Bluetooth Speaker & Camping Lantern
V1-2018.10.16

Specification
• Features high CRI LED (color temperature 4500K).


Specification	Mode	High	Medium	Low
ANSI lumens (LM)		390	160	12
Runtime(h)		8	14	157
Beam intensity(cd)		81	36	4
Beam distance(m)		18	12	4
Bluetooth Playtime(h)		20-50		
Bluetooth Range(m)		10		
Impact resistance(m)		1		
Waterproof		IPX4		

Note: The above results were tested with lithium battery (3.7V 6600mAh) under laboratory conditions. Actual performance may change if used under different environments.


- Input Voltage: 2.5-4.2V.
- Battery Capacity: 3.7V/6600mAh lithium-ion battery included.
- USB Charging Input: 5V/1A.
- USB Charging Time: 8h.
- USB Charging Output: 5V/1A.
- Switch: Button located at bottom of lamp.
- Dimension: Head Dia. 72.0mm(2.83") x Body Dia. 72.0mm(2.83") x Height 81.0mm(3.19").
- Weight: 294g(10.37oz).
- Material: PC + ABS Polymer + Aluminum Alloy.
- Accessory (included): 1 x Micro-USB Cable.
- Accessory (optional): USB charger.

Operation
Bluetooth: Press and hold the switch for 1 second to turn Bluetooth ON or OFF. Bluetooth indicator light will flash and the speaker will play an audible reminder. The name of the Bluetooth will display as "KLARUS Music". The Bluetooth indicator light will remain "ON" and the speaker will play an audible reminder.

Lamp
Push switch to turn ON / OFF. Once switched ON, push to cycle between different modes: Low -> Medium -> High -> OFF. If more than 5 seconds passes before the next press, the next press of the switch will turn off the lamp.

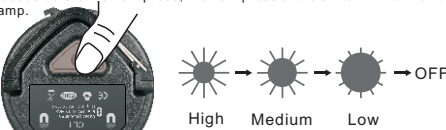

Battery Capacity Indicator
Battery Capacity indicator lights consists of 4 Green and 1 Red LED. Push the button lightly to check the battery capacity, the LED will turn off automatically after approximately 5 seconds:
4 Green LED "ON": 95%—100%
3 Green LED "ON": 65%—95%
2 Green LED "ON": 35%—65%
1 Green LED "ON": 15%—35%
1 Red LED "ON": Below 15%

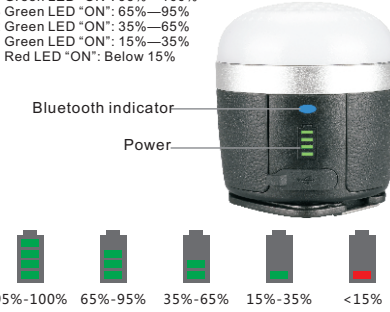

Bluetooth
• Press and hold the switch for 1 second to turn on Bluetooth. The Bluetooth and battery capacity indicator lights will turn on.
• Bluetooth indicator will flash if no Bluetooth link has been made. The Bluetooth indicator light will turn off after 5 minutes and the Bluetooth module will enter hibernation mode if no connection is made within 5 minutes. The battery capacity light will turn off after 5 seconds.
• Both Bluetooth and battery capacity indicators will remain "ON" if Bluetooth connection is established.
• If the Bluetooth connection is interrupted, The Bluetooth indicator light will turn off after 5 minutes and the Bluetooth module will enter hibernation mode if no connection is made, the battery capacity light will turn off after 5 seconds.
• Press and hold the switch for 1 second to turn off Bluetooth. The Bluetooth and battery capacity indicator lights will turn off.



Powerbank Function
Built-in 6600mAh Li-ion battery, a convenient powerbank for electronics, cellphone, tablet pc, etc.



Maintenance
• Do not aim the lamp directly at eyes to avoid injuries.
• Please charge at least once each 6 months if the lamp is in storage, this will help maintain the lithium battery.
• Unauthorized disassembly of the lamp may void warranty.

Warranty
• 2-year Warranty: Within 2-year from the sales date, the product will be repaired under warranty without additional cost.
• Limited Lifetime Warranty: Outside of the 2-year period, the repairs under warranty may incur part costs without additional labor costs.



Website



Facebook

KLARUS LIGHTING TECHNOLOGY CO., LIMITED
Address: 5/F, No.26 Building, Niulianqian Industrial Park, Longhua District, Shenzhen City, 518131, China.
Phone: +86-755-27700110
Email: info@klaruslight.com, sales@klaruslight.com
Customer Service: service@klaruslight.com
Website: www.klaruslight.com



Made in China



迷你蓝牙音箱营地灯
V1-2018.10.16

规格
• 采用高性能LED，色温4500K。


ANSI/NEMA FL1	高亮	中亮	低亮
亮度(LM)	390	160	12
续航时间(h)	8	14	157
光强度(cd)	81	36	4
射程(m)	18	12	4
蓝牙播放时间(h)	20-50		
蓝牙信号范围(m)	10		
防跌落(m)	1		
防水级别	IPX4		

备注: 上述数据以内置锂电池 (3.7V 6600mAh) 在实验室测量所得。不同使用环境可能会对以上数据产生影响。


- 工作电压: 2.5-4.2V.
- 电池容量: 内置3.7V/6600mAh锂电池。
- USB输入: 5V/1A.
- USB充电时间: 8h.
- USB输出: 5V/1A.
- 开关类型: 底部单开关。
- 尺寸: 头直径72.0mm×身直径72.0mm×高度81.0mm.
- 重量: 294g.
- 材料: PC+ABS塑料+铝合金。
- 配件: Micro-USB充电线 x 1.
- 可选配件: USB适配器。

开启/关闭
蓝牙: 任意状态长按按键1S开启/关闭蓝牙, 开启后蓝色指示灯频闪, 喇叭发出提示音, 然后播放设备连接名称为KLARUS Music的蓝牙设备, 连接成功后蓝色指示灯常亮, 喇叭发出提示音。

照明灯: 轻按按键开启/关闭照明模式, 轻按换挡, 低亮 → 中亮 → 高亮 → 关闭, 如此循环, 任意两次轻按之间间隔超过5S, 第二次轻按则关闭照明灯。

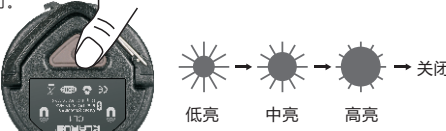

电量指示
放电、LED照明或蓝牙播放时有4个绿色和1个红色LED进行电量指示, 没有使用的时候轻按按键可以查看电量, 指示灯约5S后自动熄灭。指示如下:
4个绿灯亮: 95%—100%;
3个绿灯亮: 65%—95%;
2个绿灯亮: 35%—65%;
1个绿灯亮: 15%—35%;
1个红灯亮: 15%以下。

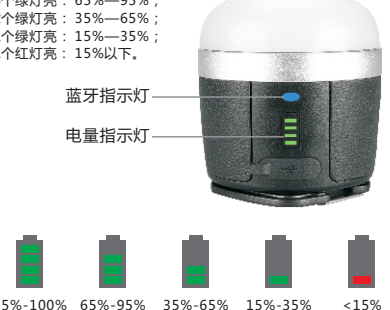

蓝牙功能
• 任意状态长按按键1秒开启蓝牙同时点亮蓝牙指示灯和电量指示灯;
• 蓝牙未连接时蓝牙指示灯频闪, 在频闪5分钟内没有蓝牙连接则蓝牙指示灯熄灭, 蓝牙模块进入休眠, 电量指示灯5秒后熄灭;
• 若蓝牙连接成功, 则蓝牙指示灯常亮, 电量指示灯常亮;
• 蓝牙连接后又断开超过5分钟, 蓝牙指示灯熄灭, 蓝牙模块进入休眠, 电量指示灯5秒后熄灭;
• 蓝牙功能开启时长按按键1秒关闭蓝牙, 进入休眠状态, 同时蓝牙指示灯和电量指示灯熄灭。



充电宝功能
• 内置6600mAh锂电池, 可给手机、ipad等绝大部分电子设备充电。



使用及维护
• 请勿将营地灯光源直接照射人或动物的眼睛, 以免对眼睛造成伤害。
• 长期不使用超过半年, 请再次给营地灯充满电量, 以提高锂电池使用寿命。
• 请勿随意拆解、改装本产品, 以免损坏本产品, 并且导致保修失效。

保修
• 15天保换期: 自售出之日起15天内, 在正常使用情况下, 出现产品质量问题, 客户可选择更换新品或维修服务, 要求更换时, 所换产品应为维修产品同型号同规格的新品; 如同型号同规格的产品停止生产时, 则调换不低于原产品性能的同品牌产品。
• 2年免费保修期: 自售出之日起2年内, 用户在正常使用情况下, 出现产品质量问题, 可享受免费维修服务。
• 终身有限保修: 超过2年免费保修期外, 提供有偿保修, 费用以实际更换材料费用为准, 不另收取人工费。



关注微信



进入官网



京东购买



淘宝购买

深圳市凯瑞兹电子科技有限公司
地址: 深圳市龙华新区民治牛栏前工业区26栋5楼
邮编: 518131
电话: +86-755-27700110
邮箱: info@klaruslight.com, sales@klaruslight.com
售后: service@klaruslight.com
网站: www.klaruslight.cn



Made in China